


**LUXOR 414**

**Article number: 4140000**

**Description**

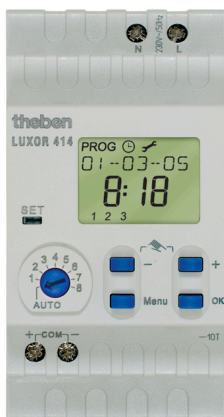


- 8-channel time switch
- For control of any outputs in LUXOR system, e.g. shutters, blinds and awnings or for lighting control
- Manual switch on device
- Daily and weekly programs
- Astronomical program (dependent on sunrise and sunset)
- Freely programmable switching times as well as pre-programmed astronomical switching times
- Easy location input via city list
- Individual link of time switch channels with the outputs via selector switch
- Positioning of drives (LUXOR 408/LUXOR 409) as well as transmission of dimming values (LUXOR 405) as percentage values
- Blocking times for suppression of brightness or twilight signals from sensor module (LUXOR 411)
- Astronomical blocking times for time shifts for moving shutters/awnings up and down
- Automatic summer/winter time changeover
- LUXOR modules are connected via 2-wire bus cable (COM bus)

**Technical data**

Operating voltage	230 V AC
Frequency	50 Hz
Width	2,5 modules
Installation type	DIN rail
Stand-by consumption	1,3 W
Number of channels	8
Connection for COM	EIB/KNX bus line type YCYM or Y(ST)Y or communication line J-Y(ST)Y/length up to 100 m
Number of memory locations	128
Ambient temperature	-10 °C ... +50 °C
Type of protection	IP 20
Protection class	II as per EN 60 730-1

**Scale drawings**

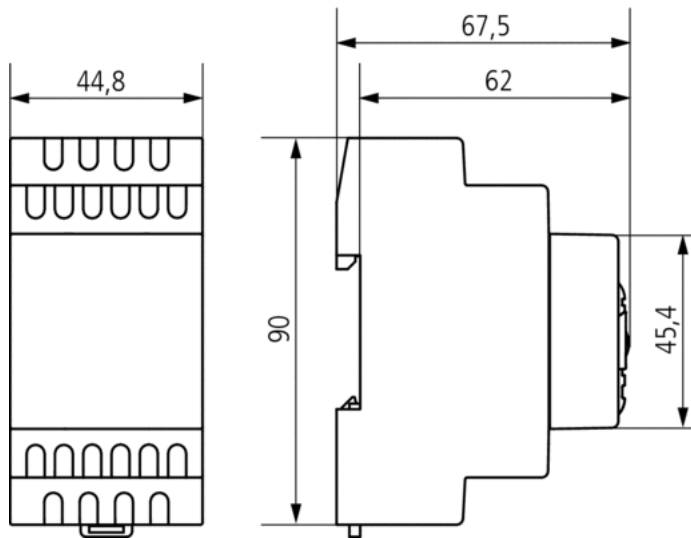

**Connection example**

