

**theben-timer 26**

**Article number: 0260030**

**Description**




- Analogue plug-in timer
- 1 channel
- Daily program
- 96 switching segments
- Shortest switching time: 15 minutes
- Without power reserve
- Synchronised with mains
- Use with earthed sockets
- Switching preselection
- Switching status display

**Technical data**

|                                                      |                                                              |
|------------------------------------------------------|--------------------------------------------------------------|
| Operating voltage                                    | 230 V AC                                                     |
| Frequency                                            | 50 Hz                                                        |
| Number of channels                                   | 1                                                            |
| Program                                              | Daily program                                                |
| Installation type                                    | Plug-in                                                      |
| Type of connection                                   | Plug-in                                                      |
| Program                                              | Daily program                                                |
| Switching capacity at 250 V AC, $\cos \varphi = 1$   | 16 A                                                         |
| Switching capacity at 250 V AC, $\cos \varphi = 0,6$ | 4 A                                                          |
| Shortest switching times                             | 15 min                                                       |
| Programmable every                                   | 15 min                                                       |
| Time accuracy                                        | Synchronised with mains                                      |
| Type of contact                                      | NO contact                                                   |
| Number of switching segments                         | 96                                                           |
| Stand-by consumption                                 | 0,9 W                                                        |
| Test approval                                        | VDE                                                          |
| Housing and insulation material                      | High-temperature resistant, self-extinguishing thermoplastic |
| Type of protection                                   | IP 20                                                        |
| Protection class                                     | I as per EN 60 730-1                                         |
| Ambient temperature                                  | -10 °C ... +55 °C                                            |

## Scale drawings

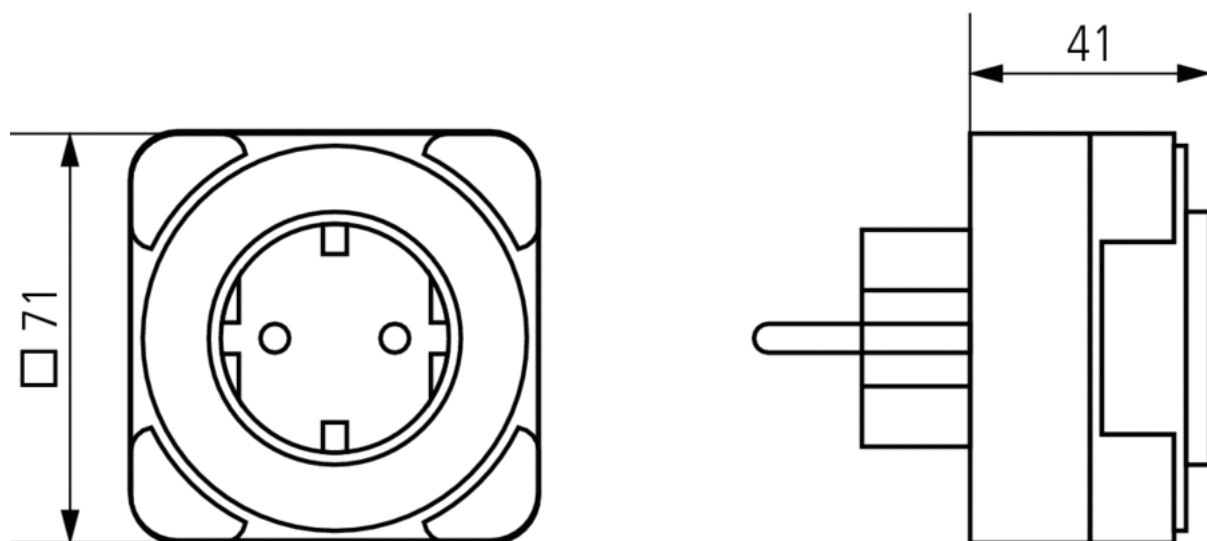

## Connection example

