

SUL 188 g

Article number: 1880033

Description




- Analogue time switch
- Daily program
- 2 channels
- Fine adjustment to set the time to the minute
- Shortest switching time: 30 minutes
- 10 tappets included in delivery
- With power reserve (NiMH rechargeable battery)
- Quartz controlled
- Tappets
- Screw terminals
- Switching status display
- Operating indication


Technical data

Operating voltage	230 V AC
Frequency	50 – 60 Hz
Number of channels	2
Program	Daily program
Width	3 modules
Installation type	DIN rail
Type of connection	Screw terminals
Drive	Quartz-controlled stepper motor
Program	Daily program
Power reserve	3 days
Switching capacity at 250 V AC, $\cos \varphi = 1$	10 A
Switching capacity at 250 V AC, $\cos \varphi = 0,6$	4 A
Shortest switching times	30 min
Programmable every	30 min
Time accuracy	$\leq \pm 1 \text{ s/day (quartz)}$
Type of contact	Changeover contact
Switching output	Potential-free and phase-independent
Stand-by consumption	0,5 W
Test approval	VDE
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Type of protection	IP 20
Protection class	II as per EN 60 730-1
Ambient temperature	-20 °C ... +55 °C

Scale drawings

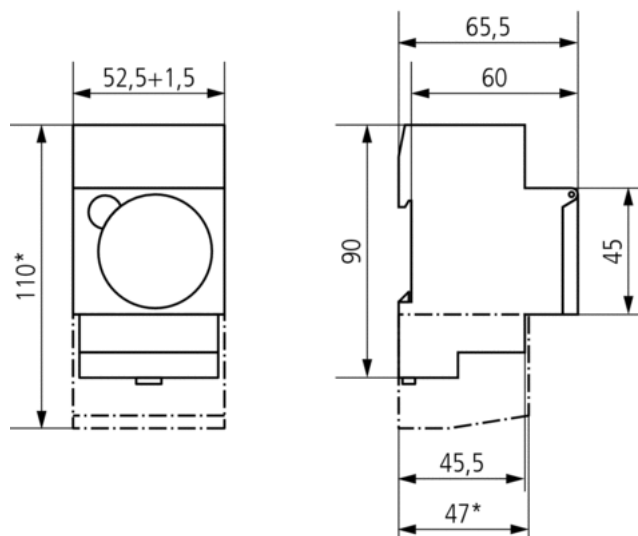

Connection example

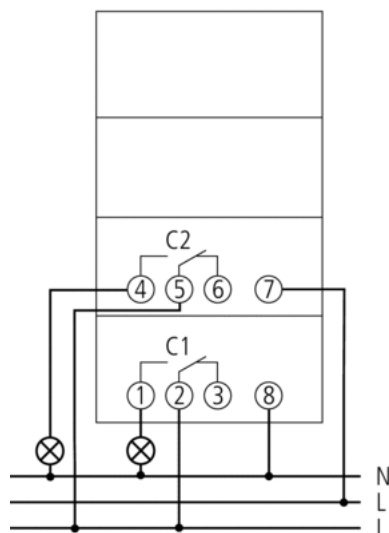

Accessories

Front panel kit

- Article number: 9070001
[Details ▶ www.theben.de](http://www.theben.de)



Terminal cover 52,5 mm

- Article number: 9070061
[Details ▶ www.theben.de](http://www.theben.de)

