

**LUXOR 411**

**Article number: 4110000**

**Description**




- Sensor module
- For controlling awnings, shutters and blinds in combination with LUXOR 412 and/or 413 and integrated light sensors
- Setting threshold values on device
- LEDs to display
- Max. input cable length of sensor line is 100 m
- LUXOR modules are connected via 2-wire bus cable (COM bus)

**Technical data**

Operating voltage	230 V AC
Frequency	50 Hz
Width	4 modules
Stand-by consumption	1,1 W
Installation type	DIN rail
Connection for COM	EIB/KNX bus line type YCYM or Y(ST)Y or communication line J-Y(ST)Y/length up to 100 m
Setting range twilight value	1 – 100 lx
Setting range sun protection	1000 – 100000 lx
Measuring range wind speed	2 – 20 m/s
Measuring range temperature	+0 °C ... +60 °C
Ambient temperature	-10 °C ... +50 °C
Type of protection	IP 20
Protection class	II as per EN 60 730-1

## Scale drawings

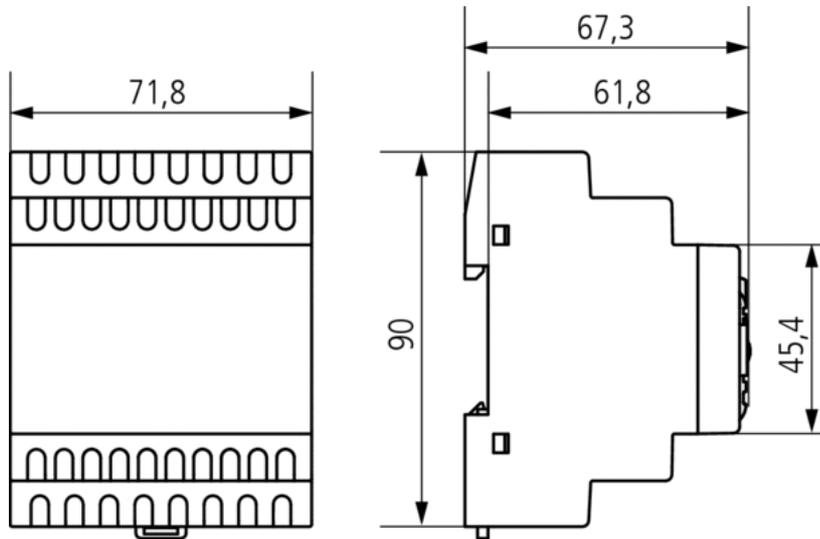

## Accessories

### Surface-mounted light sensor

- Article number: 9070008  
[Details ▶ www.theben.de](http://www.theben.de)

