



Each moment has its light

SUMMARY

iDual technology	02
Light sources	06
Luminaires	14
Outdoor lighting	25



Brand corevalues

Accessibility

Simplicity

Consistency



Compatibility

Reliability

Versatility

The most advanced lighting wireless infrared control



Simplicity is our promise to you as nothing beats the added convenience of plug, point and play.

Replace your existing lights with those from our large Collection to fit all the rooms, point at them with the Infrared.

iDual has been a trendsetter from the start. Today, we are very proud to launch a complete range of remote controlled filament lamps with high quality adjustable whites.

iDual offers the most extensive range of added value lights, from adjustable whites to colors and connected lights.

iDual, one eco-system

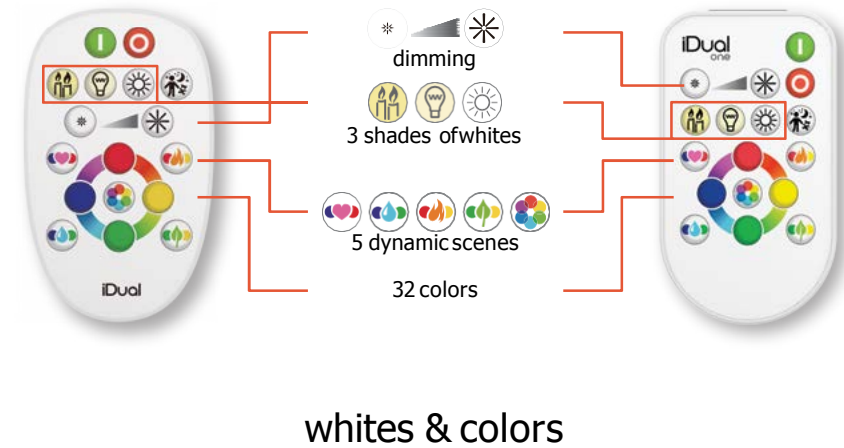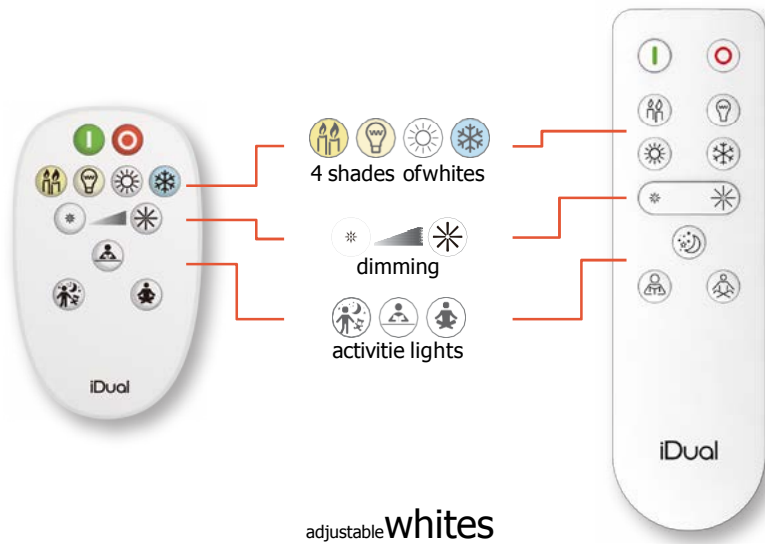

Remote Control

Flat remote control | adjustable whites
Standard in packs of lamps and luminaires,
cell batteries included.

Premium remote control | adjustable whites
AAA batteries not included.

Flat RC.	JE0001130	5420060430305	x1
Premium RC.	JE0001132	5420060432538	x1

adjustable whites



Flat remotecontrol

↓ 92mm
↔ 55mm
↗ 7.5mm



Premium remotecontrol

↓ 140mm
↔ 38mm
↗ 16.5mm

Remote Control

Flat remote control | whites & colors
 Standard in packs of lamps and luminaires,
 cell batteries included.

Standard remote control | whites & colors
 AAA batteries not included.

Standard RC.	JE0001141	5420060425042	x1
--------------	-----------	---------------	----

whites & colors



Flat remotecontrol

↓ 92mm
 ↔ 55mm
 ↗ 7.5mm




Standard remotecontrol

↓ 95mm
 ↔ 54mm
 ↗ 16.5mm

Light source



whites & colors




Material: thermal PC + Alu. core body + plastic PC diffuser
 Color of finish: white
 Color temperature: adjustable whites 2200K - 4000K & RGB
 Specificities: multi control by iDual remote control*, switch**
 * Dim/ adjustable whites / RGB via iDual infrared remote control
 GU10 | 4.5W 330lm | 50W equivalent
 G45/ C E14 | 4.5W 400lm | 50W equivalent | 220V-240V
 G100 E27 | 12W 1055lm | 75W equivalent | 220V-240V
 A60 E27/ B22 | 9W 806lm | 60W equivalent | 220V-240V

GU10	JE001810000	5420060435041	x1 W/O RC.
GU10	JE001820200	5420060435058	x2 W/ flat RC.
G45 E14	JE004810000	5420060435065	x1 W/O RC.
G45 E27	JE005810000	5420060435089	x1 W/O RC.

C E14	JE003810000	5420060435010	x1 W/O RC.
G100 E27	JE013810200	5420060435034	x1 W/ flat RC.
A60 E27	JE002810000	5420060434990	x1 W/O RC.
A60 E27	JE002820200	5420060435003	x2 W/ flat RC.

Filament amber adjustable whites




Material: amber glass
 Color of finish: amber
 Color temperature: adjustable whites 2200K - 5500K
 Specificities: multi control by iDual remote control*, switch**
 * Dim/ adjustable whites via iDual infrared remote control
 E27 | 9W 806lm | 60W equivalent | 220V-240V | Beam angle: 330°
 E14 | 5W 470lm | 40W equivalent | 220V-240V | Beam angle: 330°

A60 E27	JE0126630	5420060429361	x1 W/ORC.
A60 E27	JE0126631	5420060429408	x1 W/ flat RC.

ST64 E27	JE0186630	5420060429392	x1 W/ORC.
ST64 E27	JE0186631	5420060429439	x1 W/ flat RC.
G95 E27	JE0189630	5420060429378	x1 W/ORC.
G95 E27	JE0189631	5420060429415	x1 W/ flat RC.
G125 E27	JE0181630	5420060429385	x1 W/ORC.
G125 E27	JE0181631	5420060429422	x1 W/ flat RC.

Filament clear

adjustable whites



Material: clear glass

Color of finish: clear transparent

Color temperature: adjustable whites 2200K - 6500K

Specificities: multi control by iDual remote control*, switch**

* Dim/ adjustable whites via iDual infrared remote control

E27 | 9W 806lm | 60W equivalent | 220V-240V | Beam angle: 330°

E14 | 5W 470lm | 40W equivalent | 220V-240V | Beam angle: 330°

A60 E27	JE0126930	5420060433016	x1 W/O RC.
A60 E27	JE0126931	5420060433009	x1 W/ flat RC.

ST64 E27	JE0186930	5420060433061	x1 W/O RC.
ST64 E27	JE0186931	5420060433078	x1 W/ flat RC.
G95 E27	JE0189930	5420060433047	x1 W/O RC.
G95 E27	JE0189931	5420060433054	x1 W/ flat RC.
G125 E27	JE0181930	5420060433023	x1 W/O RC.
G125 E27	JE0181931	5420060433030	x1 W/ flat RC.

Filament E27 silver

Material: silver glass
 Color of finish: silver grey
 Color temperature:
 adjustable whites 2200K - 6500K

Specificities:

multi control by iDual remote control*, switch**

* Dim/ adjustable whites via iDual infrared remote control
 9W 500lm | 40W equivalent | E27 | 220V-240V |

Beam angle: 330°

ST64 E27	JE0186730	5420060433146	x1 W/ORC.
ST64 E27	JE0186731	5420060433153	x1 W/ flatRC.
G95 E27	JE0189730	5420060433122	x1 W/ORC.
G95 E27	JE0189731	5420060433139	x1 W/ flatRC.
G125 E27	JE0181730	5420060433108	x1 W/ORC.
G125 E27	JE0181731	5420060433115	x1 W/ flatRC.

adjustable whites



ST64


↑ 140mm
 Ø 64mm

G95

↑ 140mm
 Ø 95mm

G125

↑ 175mm
 Ø 125mm

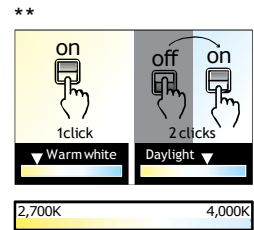

Filament PS160

Material: glass

Color of finish: amber/ silver

Color temperature:

adjustable whites 2200K - 5000K

Specifities:

multi control by iDual remote control*, switch**

* Dim/ adjustable whites via iDual infrared remote control

Silver | 7W 150lm | 15W equivalent

Amber | 7W 450lm | 35W equivalent

E27 | 220V-240V | Beam angle: 330°

Amber	JE0166631	5420060433177	x1 W/ flatRC.
Silver	JE0166731	5420060433191	x1 W/ flatRC.

adjustable whites




amber

↑ 300mm
Ø 160mm

silver

↑ 300mm
Ø 160mm

**



Filament G200

Material: glass

Color of finish: amber/ silver

Color temperature:

adjustable whites 2200K - 5000K

Specifities:

multi control by iDual remote control*, switch**

* Dim/ adjustable whites via iDual infrared remote control


Silver | 7W 150lm | 15W equivalent

Amber | 7W 450lm | 35W equivalent

E27 | 220V-240V | Beam angle: 330°

Amber	JE0162631	5420060433214	x1 W/ flatRC.
Silver	JE0162731	5420060433375	x1 W/ flatRC.

adjustable whites



amber

↑ 300mm
Ø200mm

silver

↑ 300mm
Ø200mm



Luminaires



Performa

Integrated LED downlight IP65 round fixed ring
7W 400lm | 50W equivalent halo | 220 - 240V

Material: Aluminum+PC

Color of finish: white/ brushed nickel

Color temperature:

adjustable whites 2200K - 4000K + RGB

Specificities: Dim/ adjustable whites/ RGB via
iDual infrared remote control

Beam angle: 100°

LED driver separated from luminaire 0.5m black
secondary cable

Cutting: 70mm

White	JE1295400	5420060425080	x1 W/O RC.
Brushed nickel	JE1295408	5420060425103	x1 W/O RC.
White	JE1295430	5420060425097	x3 W/ flat RC.
Brushed nickel	JE1295438	5420060425110	x3 W/ flat RC.

whites & colors



↓ 33mm
Ø 85mm



Argon

Integrated LED downlight IP44 round fixed ring
7.5W 420lm | 50W equivalent halo | 220 - 240V

Material: glass ring + PCdiffuser

Color of finish: frosted white

Color temperature:

adjustable whites 2200K - 4000K + RGB

Specificities: Dim/ adjustable whites/ RGB via
iDual infrared remote control

Beam angle: 100°

LED driver separated from luminaire 0.5m black
secondary cable


Cutting: 70mm

Argon	JE1295401	5420060426988	x1 W/O RC.
Argon	JE1295431	5420060425875	x3 W/ flat RC.

whites & colors



↓ 62mm
Ø 100mm



Aluminium cliplock (Retrofit downlight)

Retrofit LED downlight IP23 round adjustable ring
Light source is replaceable with GU10 iDual bulb included

GU10 330lm | 50W equivalent halo | 220 - 240V

Material: aluminum die cast cliplock + plastic basic connect box

Color of finish: white/ brushed nickel

Color temperature:

adjustable whites 2200K - 4000K + RGB

Specificities:

multi control by iDual remote control*, switch**

* Dim/ adjustable whites/ RGB via iDual infrared remote control

Beam angle: 100°



Cutting: 74 mm

White	JE1195430	5420060425837	x3 W/ flat RC.
Brushed nickel	JE1195438	5420060425844	x3 W/ flat RC.

whites & colors



↓ 68mm
Ø 82mm



Round panel (Flat downlight)

Integrated LED flat downlight IP20 round fixed ring

120mm | 8W 470lm | 220 - 240V |

cutting: 108mm

170mm | 12W 800lm | 220 - 240V |

cutting: 155mm

225mm | 18W 1200lm | 220 - 240V |

cutting: 207mm

Material: aluminum ring + PC diffuser

Color of finish: white

Color temperature:


adjustable whites 2200K - 4000K + RGB

Specificities: Dim/ adjustable whites/ RGB via
iDual infrared remote control

Beam angle: 100°

120mm	JE1192400	5420060425899	x1 W/O RC.

whites & colors

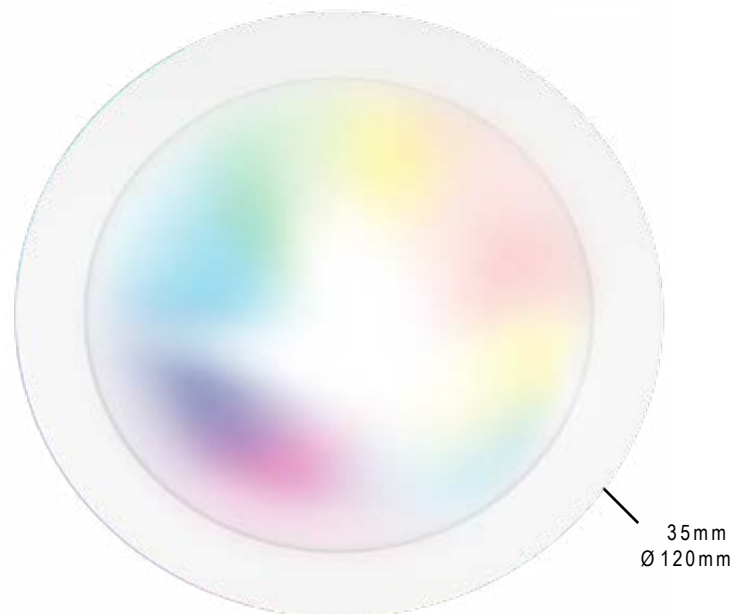

Glam/ Yam / Lilas

- Light flux
Glam/Yam: 500lm
Lilas: 380lm
- Input voltage: 220 - 240V
- Integrated LED construction
- CCT: 2200K - 4000K + RGB
- CRI > 80
- Lifetime: 20000h
- Main parts material
Glam/Yam: body - glass, base - plastic
Lilas: body - plastic, base - metal
- Fixture color
Glam/Yam: white, painted aluminum
Lilas: glossy white

Glam	JE600004	5420060425158	x1 W/ flat RC.
Yam	JE601004	5420060425172	x1 W/ flat RC.
Lilas	JE700104	5420060425813	x1 W/ flat RC.

whites & colors



Glam

↓ 198mm
Ø 200mm



Yam

↓ 258mm
Ø 137mm



Lilas

↓ 115mm
↔ 105mm
↙ 90mm




whites & colors



Starr

↓ 90mm
Ø 260mm



Moon /Starr

- Light flux:
 - 260mm - 1000lm
 - 350mm - 1500lm
 - 390mm - 1800lm
- Input voltage: 220 - 240V

- Integrated LED construction
- CCT: 2, 200K - 4, 000K + RGB
- CRI > 80
- Lifetime: 20, 000h
- Main parts material:
 - Diffuser - plastic
 - Base - metal
- Fixture color: white

Starr 260	JE509014	5420060429255	x1 W/ flat RC.

Stripe


- Light flux: 200lm / m
- Input voltage: 220 - 240V
- CCT: 2200K - 4000K + RGB
- CRI > 80
- Lifetime: 20000h
- Main parts material:
 - Flexible PCB + Epoxy
- Fixture color: White
- 3m starter kit extendable to 6m, 3M double side tape at the back, cuttable every 25cm
- 24V plug in driver with 1.5m white secondary cable and DC jacket.
- 3m add on
- Fixation type: double side adhesive, Material: 3M adhesive tape

3m Starter	8101020000	5420060435133	x1 W/ flat RC.
3m Addon	8101021000	5420060435140	x1 W/O RC.

whites & colors



↓ 10.5mm
 ← 3000mm
 ↗ 3.5mm



whites & colors



Epona 3L

↓ 185mm
 ↳ 530mm
 ↗ 90mm



Epona 1L

↓ 160mm
 ↳ 80mm
 ↗ 80mm




Epona 2L

↓ 185mm
 ↳ 385mm
 ↗ 90mm



Epona 4L

↓ 185mm
 ↳ 610mm
 ↗ 90mm



Epona

- Light flux: 330lm/L
- Input voltage: 220 - 240V
- Light source is replaceable with GU10 iDual bulb included
- CCT: 2200K - 4000K + RGB

- CRI > 80
- Lifetime: 20000h
- Main parts material:
 - Diffuser - plastic
 - Base - metal
- Fixture color: brushed nickel, white

Brushednickel 1L	JE251194	5420060427824	x1 W/ flat RC.
Brushednickel 2L	JE251294	5420060427831	x1 W/ flat RC.
Brushednickel 3L	JE251794	5420060427848	x1 W/ flat RC.
Brushednickel 4L	JE251694	5420060427855	x1 W/ flat RC.




iDual office Shanghai

Rm. A201 Building 8, No.689 Chundong Road
Minhang District
Shanghai 201108 - China
Tel: +86 21 3336 3301
info@idual.com

iDual factory Yuyao (Ningbo)

No 36, Fengyuan Road
Yuyao city
Zhejiang province - China
Tel: +86 574 6276 0785

 idual.com