NIEDAX GROUP

NIEDAX®

GC... ^NX CITO _LINE_ ONE CLICK - DONE! 2010
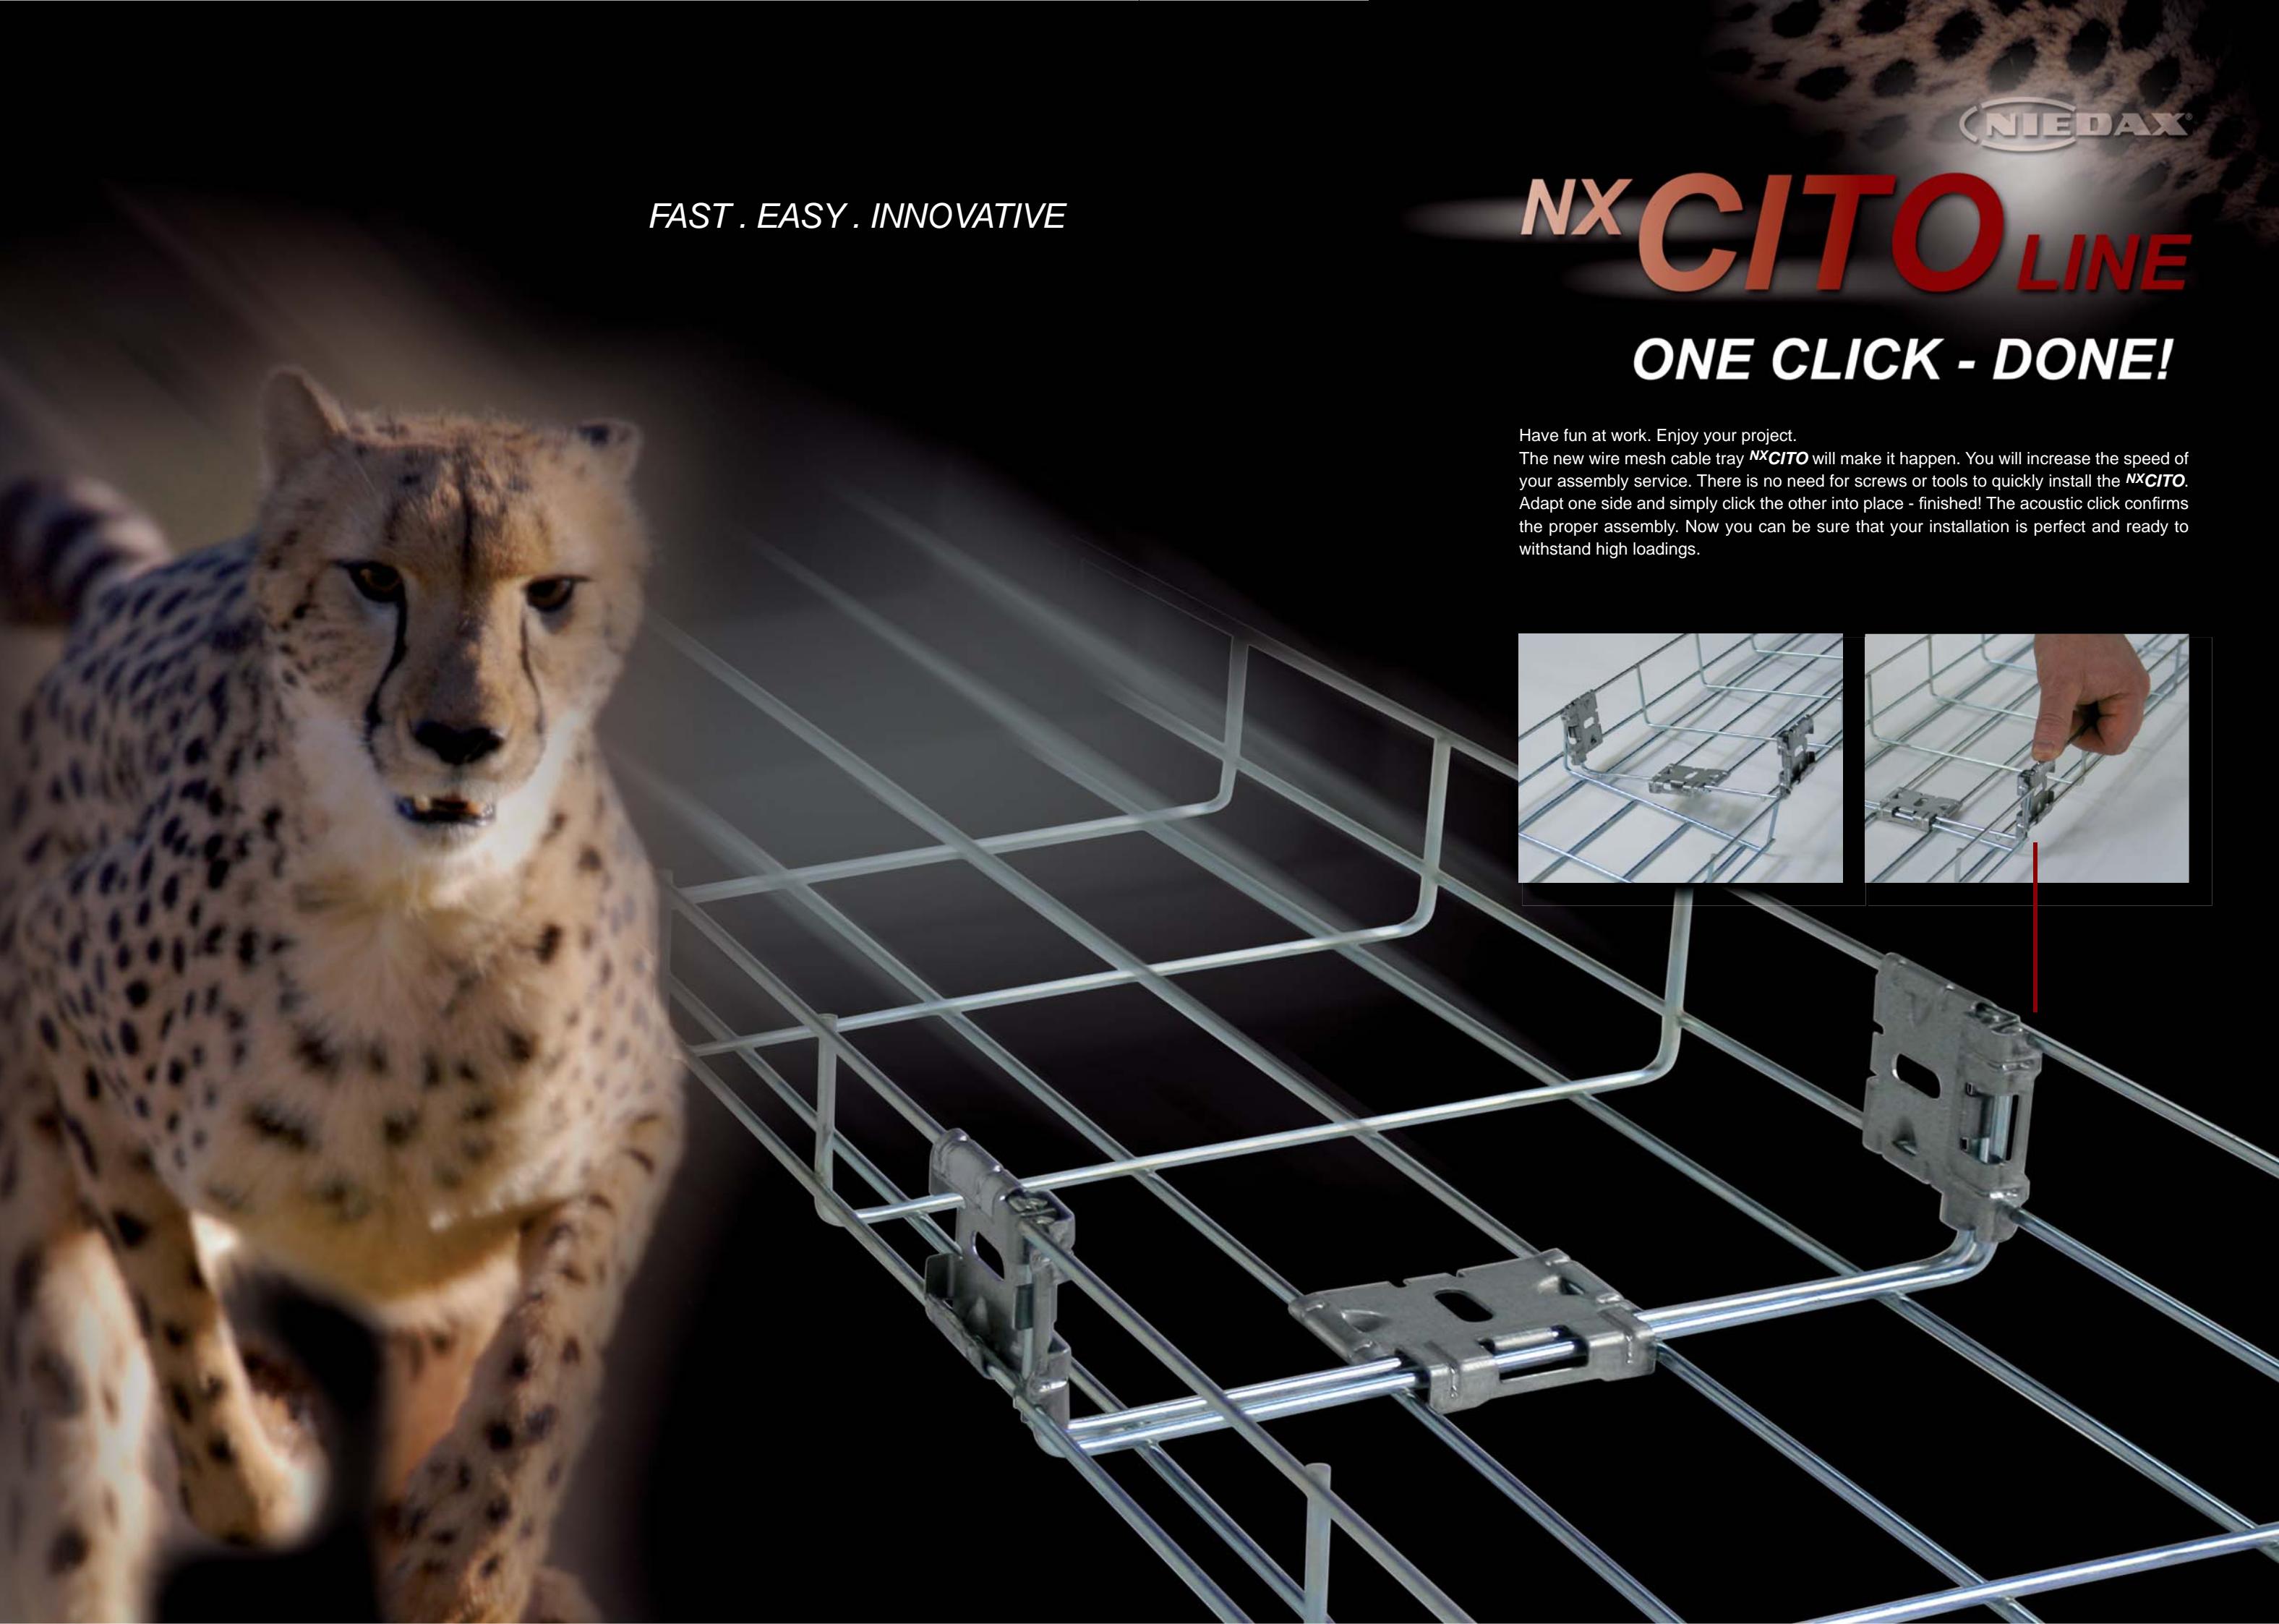
FAST . EASY . INNOVATIVE

NIEDAX®

NXCITO LINE

ONE CLICK - DONE!

Have fun at work. Enjoy your project.
The new wire mesh cable tray **NXCITO** will make it happen. You will increase the speed of your assembly service. There is no need for screws or tools to quickly install the **NXCITO**. Adapt one side and simply click the other into place - finished! The acoustic click confirms the proper assembly. Now you can be sure that your installation is perfect and ready to withstand high loadings.
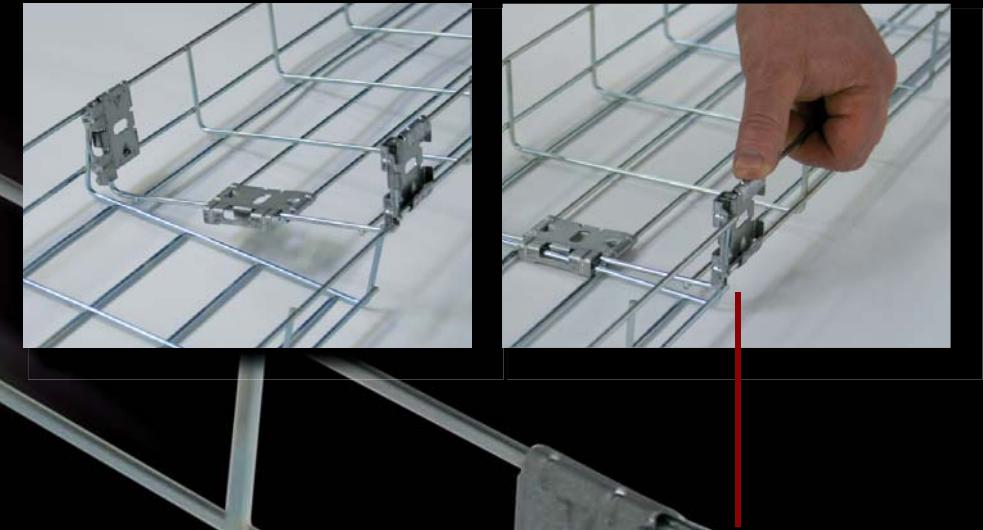
MULTIFUNCTIONAL . FLEXIBLE . COMPATIBLE

NIEDAX

NX CITO LINE

ONE CLICK - DONE!

Save time. The new wire mesh cable tray **NX CITO** offers you a crucial advantage: the pre-assembled fixed connector. Fittings such as bends, T-pieces and protrusion heights can be easily customized with the new **NX CITO**. A quick installation of the **NX CITO** to various consoles is enabled by the GRBA 40 E2 mesh cable mounting clip: one click - done!
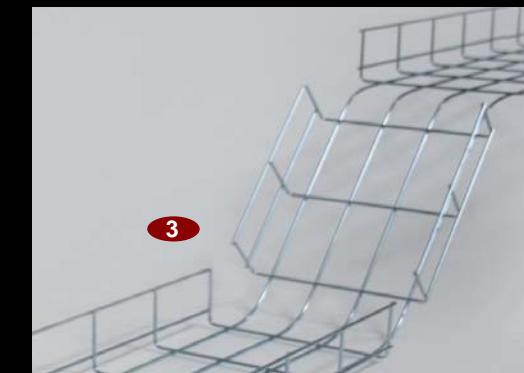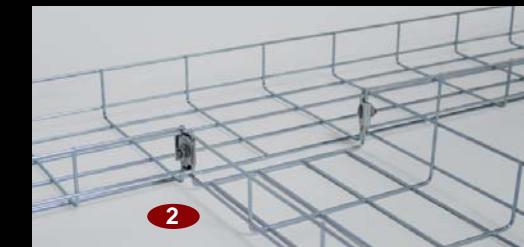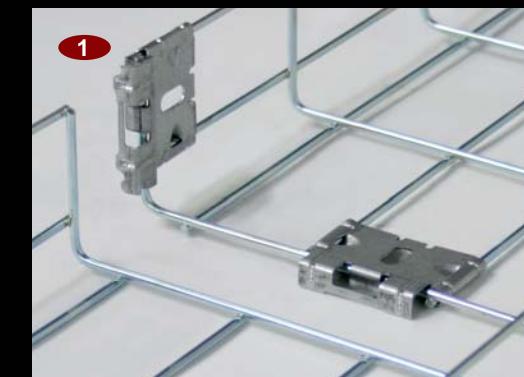
GRBA 40 E2

| 1 | Factory pre-assembled connector |

Multiple mounting options **NX CITO**, for example:

2	T-piece
3	Horizontal Protrusion Heights
4	Arc

Quick fastening of the **NX CITO** to different consoles, for example:

| 5 | with GRBA 40 E2 TKS |
6	with GRBA 40 E2 KTAM
7	with GRBA 40 E2 KTUL
8	with GRBA 40 E2 to KTAL

FUNDAMENTAL . EASY . EFFICIENT

NX**CITO** LINE

ONE CLICK - DONE!

Get an overview of the product range with different sizes and materials. It will help you staying flexible. Have fun at work. Enjoy your project.
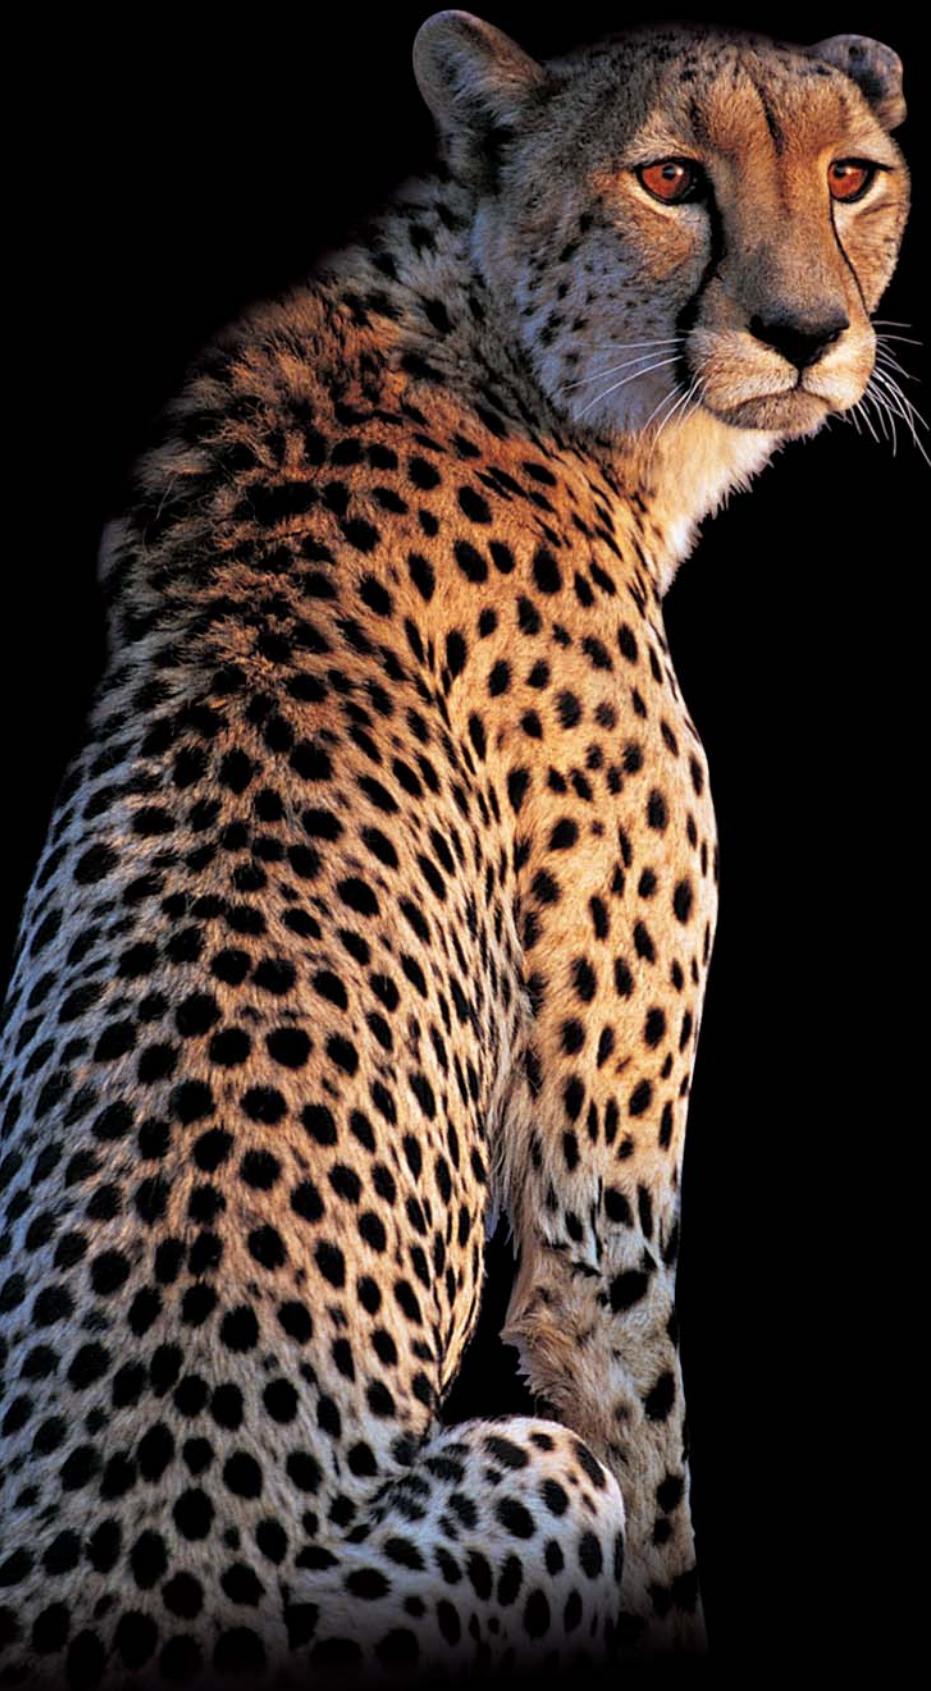
By the way: you'll also save valuable time if you have to dismount **NXCITO**. No tools are needed. Simply press the side-mounted connector and lift off the wire mesh. Done!

Wire Mesh Tray
U-shaped, with pre-assembled splice plate

	model no.	height (H)	width B	thick-ness (t)	EAN code	Weight per 100	smallest PU
		mm	mm	mm		kg	
V	GC 60.100	60	100	3,5	948291	62	2 x 3 m
V	GC 60.200	60	200	3,5	948307	84	2 x 3 m
V	GC 60.300	60	300	4	948314	140	2 x 3 m
V	GC 60.400	60	400	4	948321	170	2 x 3 m
V	GC 60.500	60	500	4	948338	199	2 x 3 m
V	GC 60.600	60	600	4	948345	229	2 x 3 m
E3	GC 60.100 E3	60	100	3,5	948352	62	2 x 3 m
E3	GC 60.200 E3	60	200	3,5	948369	84	2 x 3 m
E3	GC 60.300 E3	60	300	4	948376	140	2 x 3 m
E3	GC 60.400 E3	60	400	4	948383	170	2 x 3 m

from wire rod, spot welded

Load Chart: q = uniformly distributed load (tested according to DIN EN IEC 61537 standard)

4 Felder (L) + 2 verkürzte Endfelder (0,8 x L)

Load chart: Uniformly distributed load q (vertical axis, 0–600) vs Support Span (m) (horizontal axis, 0,5–3). Curves: GC 60.100-200, GC 60.300-400, GC 60.500-600.

Specified load ratings are independant of splice plate location.
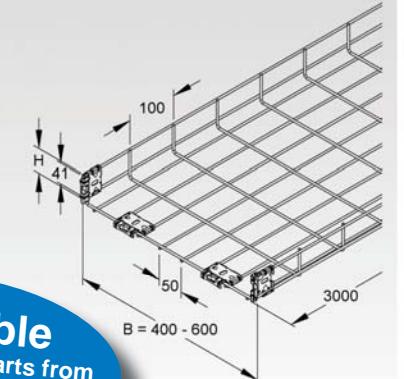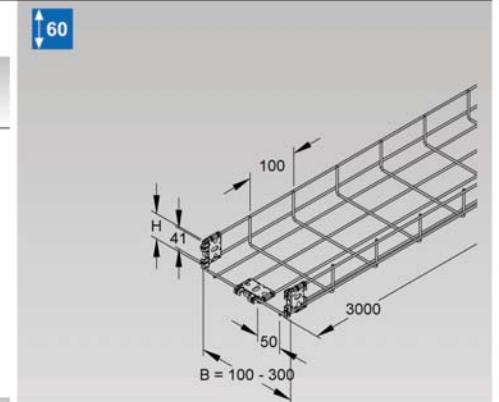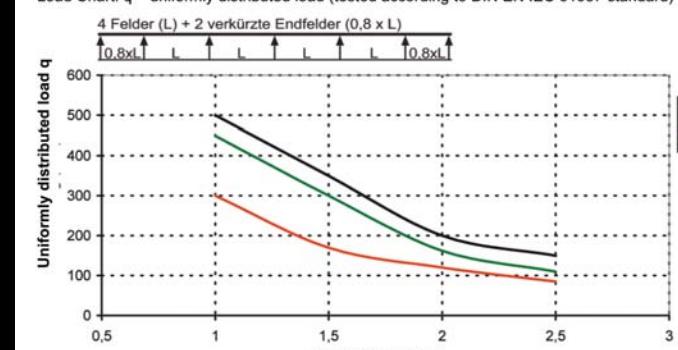
Compatible with all accessory parts from our catalogue **KR**

Wire mesh tray fixing clip

	model no.	for wire gauge		EAN code	Weight per 100	smallest PU
		mm	mm		kg	
E2	GRBA 40 E2	3,5 - 4,8	7 x 40	948390	0,6	50 St.

To be used for: TKS 100-400, TKSU 100-300, KTAL 100-300, KTAM 100-600, KTUL100-400, KTUM 100-400 und TW 100-600

The mounting links of wire mesh tray fixing clip were insert into the slotted holes of the bracket support surface and turned down. A shifted arrangement of the fixing clips guarantee a secure mounting

Ø 3,5 - 4,8 mm

LL 7x40 mm

NIEDAX GROUP

NX 0029 01_GB