

Description




- Presence detector (PIR)
- For flush-mounting (concrete ceiling)
- With metal installation frame for screwed fixing in wooden ceilings or in flush-mounted sockets, incl. cover
- Square 360° detection area allows accurate and simple planning
- Flush design
- Mixed light measurement
- Presence and brightness-dependent control for lighting and HVAC systems
- Choice of fully or semi-automatic lighting control
- Connection option for sensors or switches for manual switching with automatic recognition
- Adjustable sensitivity
- Can be configured remotely
- Installation with mechanical stop
- Lighting control with brightness threshold value and self-learning switch-off delay
- Pulse function for staircase time switch
- Presence output with switch-on and switch-off delay
 - Room monitoring with selective movement detection
 - Management remote control SendoPro 868-A (optional)
 - theSenda S user remote control (optional)
- Parameters can be selected for subsequent changes
- Test operation mode checks the detection area and brightness threshold
- Individual covers available on request

Technical data

Operating voltage KNX	Bus voltage, ca. 14 mA
Recommended installation height	2,5 – 3,5 m
Setting range brightness	5 – 2000 lx
Detection angle	360°
Type of connection	KNX bus terminal
Installation type	Ceiling installation (flush-mounting concrete)
Light switch-off delay	30 s–60 min
Lamps	Energy saving lamps, fluorescent lamps, Incandescent/halogen lamps, LEDs
Light measurement	Mixed light measurement
Presence switch-off delay	10 s–120 min
Switch-on delay presence	10 s – 30 min
Ambient temperature	+0 °C ... +50 °C
Colour	Silver (similar to RAL 9006)
Type of protection	IP 40


Detection range

Mounting height (A)	Sitting (S)	Walking (T)
2 m	20 m ² 4,5 m x 4,5 m	36 m ² 6 m x 6 m ± 0,5 m
2,5 m	36 m ² 6 m x 6 m	64 m ² 8 m x 8 m ± 0,5 m
3 m	49 m ² 7 m x 7 m	81 m ² 9 m x 9 m ± 1 m
3,5 m	64 m ² 8 m x 8 m	100 m ² 10 m x 10 m ± 1 m

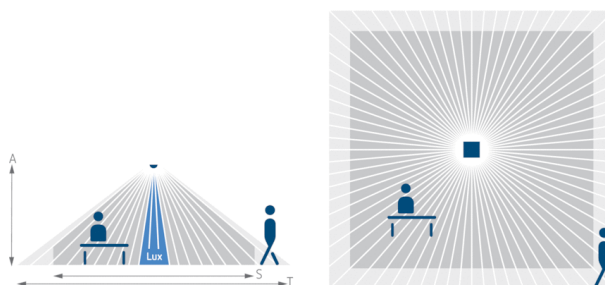

Article number: 2059204

Scale drawings

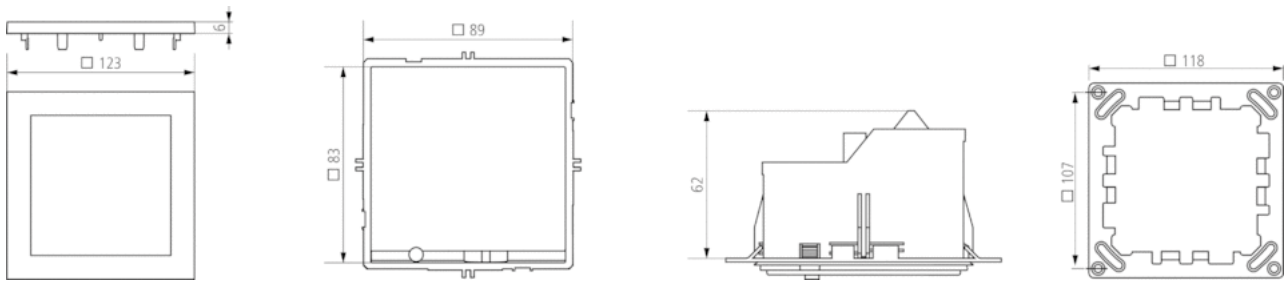

Accessories

PlanoBox 1SR

- Article number: 9070733
Details ▶ www.theben.de



SendoPro 868-A

- Article number: 9070675
Details ▶ www.theben.de



theSenda S

- Article number: 9070911
Details ▶ www.theben.de



Junction casing, 115x115x100 mm

- Article number: 9070689
Details ▶ www.theben.de



QuickSafe

- Article number: 9070531
Details ▶ www.theben.de

